




***ACTION* FIT**

**PREMIUM RECYCLED RUBBER GYM MATS
& INTERLOCKING TILES**

DATA BOOK

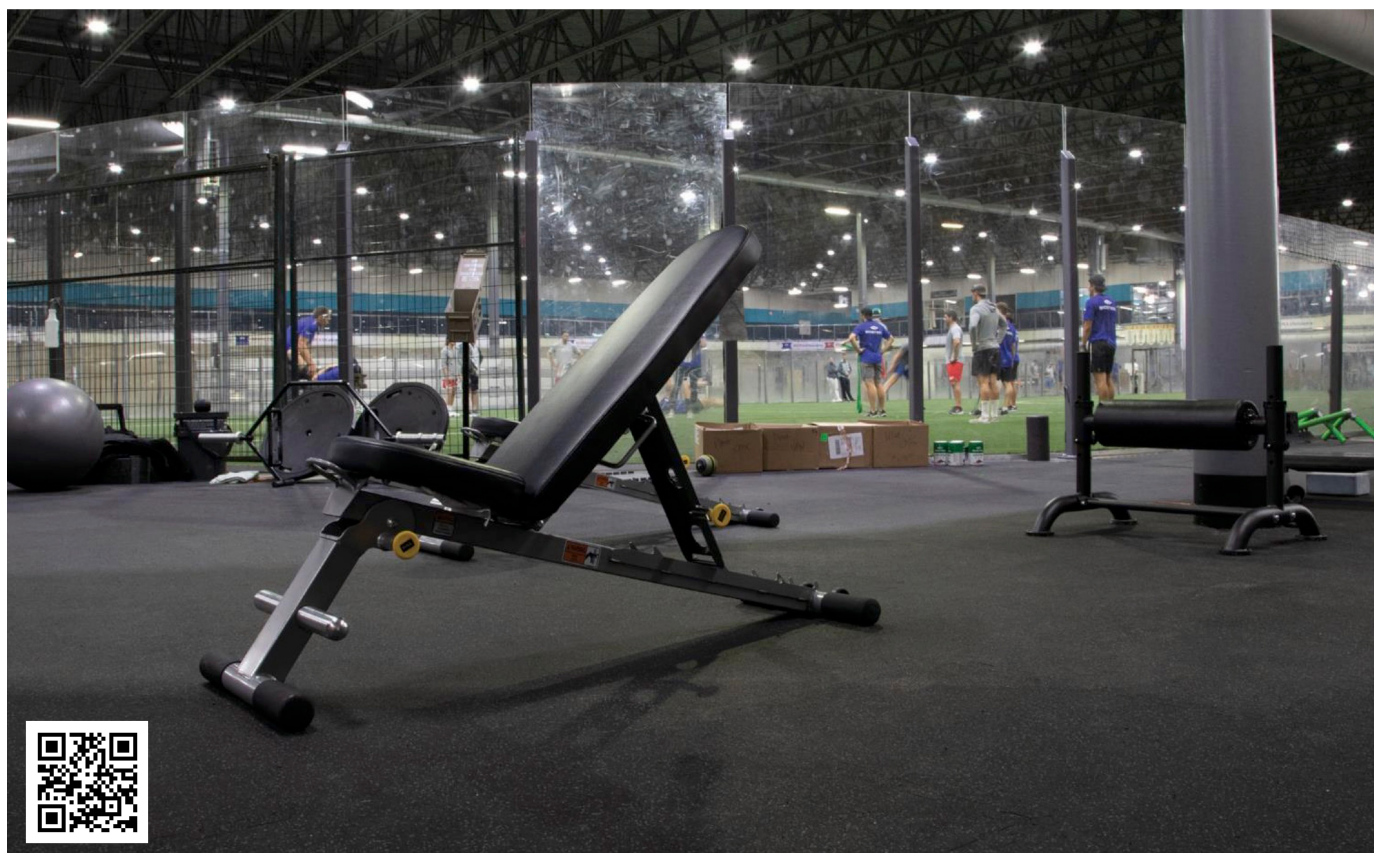



CLASSIFICATION	Recycled Rubber Rolls	Recycled Rubber Tiles
SIZE	4' x 25' Rolls	24" x 24" Tiles
OVERALL THICKNESS	8mm	8mm
INSTALLATION METHOD	Glue Down	

PERFORMANCE SPECIFICATIONS


CHEMICAL RESISTANCE	ASTM F925 Superior	No Change
DENSITY	ASTM D3676 PCF	80pcf
HARDNESS	ASTM D2240	(Shore) 60+/-5
TEAR STRENGTH	ASTM D624	70 pli min - 80 pli min
ELONGATION	ASTM D412	145% - 300%
STATIC LOAD LIMIT	ASTM F970 .001	250 PSI
STATIC COEFFICIENT OF FRICTION	ASTM2047	>0.95
TENSILE STRENGTH	ASTM D412	200 PSI - >200 PSI
FLEXIBILITY	ASTM F137	1/4 Mandrel Press
TABER ABRATION	ASTM D4060	18,000 Cycles
FORCE REDUCTION	ASTM F2772	12.9% - 13.7%
SLIP RESISTANCE	ASTM F2772	Pass
VOC COMPLIANT	ASTM D5116	CA 1350
ENERGY RESTITUTION	ASTM F2772	85% - 86%
ABRATION RESISTANCE	ASTM D3389	>1.7g, 1000 Cycles
PILL TEST	ASTM D2859	Pass



ROLLS



BURPEE BLACK
RBR-ROLLBLACK8X4

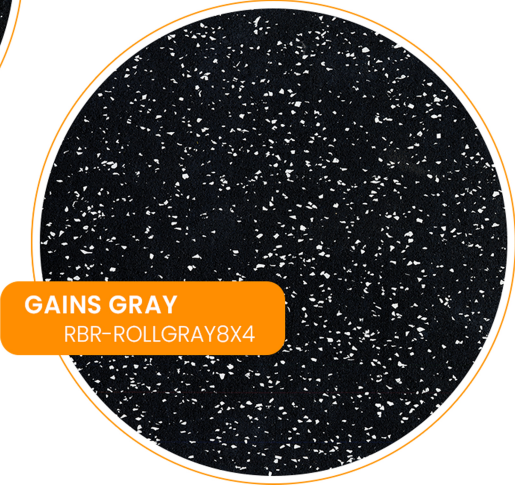

GAINS GRAY
RBR-ROLLGRAY8X4




BACK SQUAT BLUE
RBR-ROLLBLUE8X4

TILES



BURPEE BLACK
RBR-ZIPBLACK824

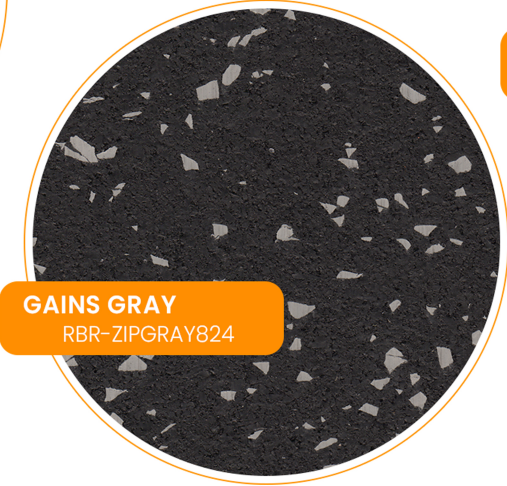

GAINS GRAY
RBR-ZIPGRAY824



BACK SQUAT BLUE
RBR-ZIPBLUE824

BURPEE BLACK



BURPEE BLACK
RBR-ROLLBLACK8X4

BURPEE BLACK
RBR-ZIFBLACK824

CLASSIFICATION

Recycled Rubber Rolls & Tiles

ROLL SIZE

4' x 25'

TILE SIZE

24" x 24"

OVERALL THICKNESS

8mm

INSTALLATION METHOD

Glue Down

DENSITY (ASTM D3676)

60 pcf - 80 pcf

WARRANTY

5 Year Limited Warranty

ACTION FIT

SPECTRUM COLLECTION PREMIUM RECYCLED RUBBER FLOORING

RECOMMENDED ADHESIVES:



BOSTIK PRO-CURE



TAYLOR PINNACLE

SPECTRUM
FLOORING



GAINS GREY



GAINS GRAY
RBR-ROLLGRAY8X4



GAINS GRAY
RBR-ZIPGRAY824

CLASSIFICATION

ROLL SIZE

Recycled Rubber Rolls & Tiles

4' x 25'

TILE SIZE

24" x 24"

OVERALL THICKNESS

8mm

INSTALLATION METHOD

Glue Down

DENSITY (ASTM D3676)

60 pcf - 80 pcf

WARRANTY

5 Year Limited Warranty

ACTION FIT

SPECTRUM COLLECTION PREMIUM RECYCLED RUBBER FLOORING

RECOMMENDED ADHESIVES:



BOSTIK PRO-CURE



TAYLOR PINNACLE



BACK SQUAT BLUE



BACK SQUAT BLUE
RBR-ROLLBLUE8X4

BACK SQUAT BLUE
RBR-ZIPBLUE824

CLASSIFICATION	Recycled Rubber Rolls & Tiles
ROLL SIZE	4' x 25'
TILE SIZE	24" x 24"
OVERALL THICKNESS	8mm
INSTALLATION METHOD	Glue Down
DENSITY (ASTM D3676)	60 pcf - 80 pcf
WARRANTY	5 Year Limited Warranty

ACTION FIT

SPECTRUM COLLECTION PREMIUM RECYCLED RUBBER FLOORING

RECOMMENDED ADHESIVES:



BOSTIK PRO-CURE



TAYLOR PINNACLE

